


Aerotight All Metal Locking Nut

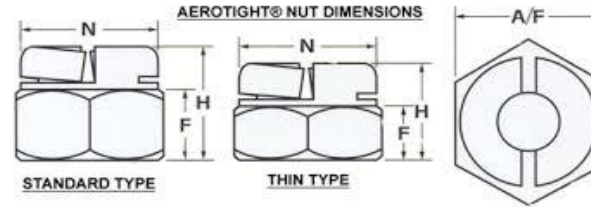

Aerotight All Metal Locking Nut												
Thread	M2.5	M3	M3.5	M4	M5	M6	M8	M10	M12	M16	M20	M24
Pitch	0.45	0.50	0.65	0.70	0.80	1.00	1.25	1.50	1.75	2.00	2.50	3.00
A/F - Maximum	5.00	5.50	7.00	7.00	8.00	10.00	13.00	17.00	19.00	24.00	30.00	36.00
N Diameter - Maximum	4.75	5.25	6.65	6.65	7.65	9.58	12.62	16.53	18.47	23.47	29.47	35.18
H - Maximum	2.97	3.52	4.79	4.79	6.02	7.95	10.05	12.03	14.48	18.75	22.35	26.85
F - Minimum	1.49	1.89	2.69	2.69	3.49	4.63	5.87	7.62	9.62	12.62	15.62	18.62

Material	Diameter
<i>Stainless Steel Grade 303</i>	<i>M2.5 - M24</i>
<i>Stainless Steel Grade 316</i>	<i>M2.5 - M24</i>
<i>Stainless Steel Grade A4-80</i>	<i>M2.5 - M24</i>
<i>Mild Steel 230 M07 Non Leaded BS970</i>	<i>M2.5 - M24</i>
<i>Brass BS 2874 CZ121</i>	<i>M2.5 - M24</i>

INFORMATION AND DRAWINGS PROVIDED ARE FOR REFERENCE ONLY