


### Ankerbolt Csk Head Torx Drive



Ankerbolt Csk Head Torx Drive													
Part Number					Shallow Embedment			Deep Embedment			Minimum Structure Thickness	Torx Driver Size	Tightening Torque Nm
	Drill Diameter mm	Thread Diameter mm	Anchor Length mm	Fixture Clearance Hole	Maximum Fixture Thickness	Minimum Hole Depth	Embedment Depth	Maximum Fixture Thickness	Minimum Hole Depth	Embedment Depth			
JAB05/06030CS	5	6	30	8	5	35	25	N/A	50	37	100	T25	15
JAB05/06050CS			50		25			13					
JAB05/06075CS			75		50			38					
JAB05/06100CS			100		75			63					
JAB06/08030CS	6	8	30	10	5	40	30	N/A	55	45	100	T30	25
JAB06/08050CS			50		20			5					
JAB06/08075CS			75		45			30					
JAB06/08100CS			100		70			55					
JAB06/08130CS			130		100			85					
JAB06/08150CS	150	120	105										
JAB08/10060CS	8	10	60	12	20	55	40	N/A	75	60	120	T45	40
JAB08/10075CS			75		35			15					
JAB08/10100CS			100		60			40					
JAB10/12060CS	10	12	60	14	10	70	50	N/A	96	75	125	T50	60
JAB10/12075CS			75		25			N/A					
JAB10/12100CS			100		50			25					

Material: Steel Zinc Plated Minimum 5um

Suitable For Use In The Following Materials  
 Concrete C22/25 To C50/60  
 Non Cracked Concrete  
 Hollow Concrete Planks  
 Solid Brickwork  
 Concrete Block  
 Natural Stone

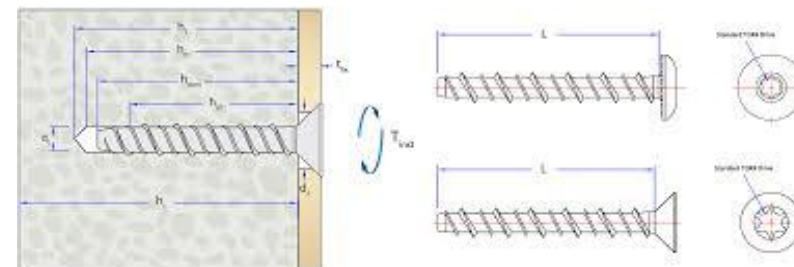

INFORMATION AND DRWAINGS PROVIDED ARE FOR REFERENCE ONLY