

Ankerbolt Pan Head Torx Drive



Ankerbolt Pan Head Torx Drive													
Part Number					Shallow Embedment			Deep Embedment					
	Drill Diameter mm	Thread Diameter mm	Anchor Length mm	Fixture Clearance Hole	Maximum Fixture Thickness	Minimum Hole Depth	Embedment Depth	Maximum Fixture Thickness	Minimum Hole Depth	Embedment Depth	Minimum Structure Thickness	Torx Driver Size	Tightening Torque Nm
JAB05/06050PH	5	6	50	8	25	35	25	13	50	37	100	T25	15
JAB05/06075PH			75		50			38					
JAB05/06100PH			100		75			63					
JAB06/08030PH	6	8	30	10	5	40	30	N/A	55	45	100	T30	25
JAB06/08050PH			50		20			40					
JAB06/08075PH			75		45			60					
JAB06/08100PH			100		70			55					


Steel: Zinc Plated Minimum 5um

Suitable For Use In The Following Materials

Concrete C20/25 AND C50/60

Non-Cracked Concrete

Hollow Concrete Planks - Solid Brickwork - Concrete Block - Natural Stone

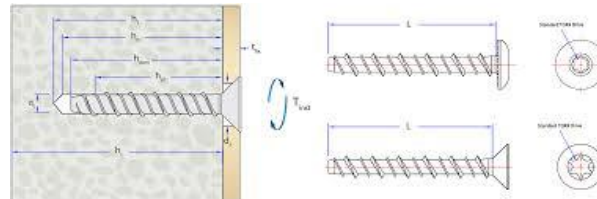

INFORMATION AND DRAWINGS PROVIDED ARE FOR REFERENCE ONLY