



BL Beam Clamps



BL Beam Clamps									
Product Code	A	B	C	D	E	Tightening Torque (Nm)	3 to 1 Factor Of Safety Applied		
							Tensile Load In Line With Rod (Kn)	Tensile Load At Nose (Kn) Per Pair	Lateral Load (Kn)
BLG08A	12.5	45	40	5 to 20	24	10	1	7.4	0.25
BLG10A	14	58	47	3 to 30	30	20	2.5	9.3	0.4
BLG12A	15	65	51.5	7 to 35	34	40	5	11	0.6
BLG16A	20	95	58	8 to 55	44	90	7.5	20.3	0.7
BLG20A	23	116	66	8.8 to 70	53	180	9	23.3	0.75
BLG24A	26	147	73	8 to 95	62	200	10.5	34.3	0.8

DO NOT EXCEED THE SAFE WORKING LOAD (SWL) SPECIFIED
THE SAFE WORKING LOADS ARE BASED ON ASSEMBLIES IN TYPICAL CONDITIONS

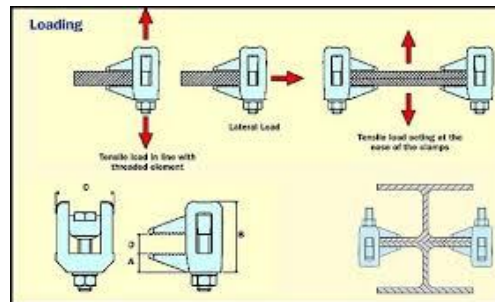

- One Tool For Installation
- Hot Dip Galvanised To BS EN ISO 1461
- Extensive Fixing Range
- Can Accommodate Clips / Brackets
- Tested For Tensile And Lateral Loading