


BUMAX 88 ANSI B 18.2.1 UNC Hexagon Head Bolts

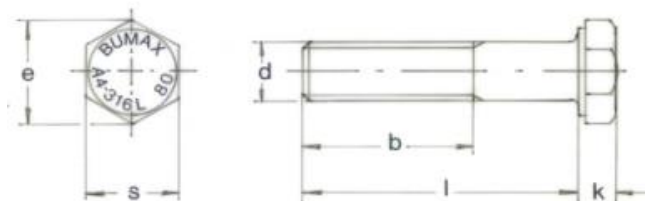

BUMAX 88 ANSI B 18.2.1 UNC Hexagon Head Bolts								
Diameter	1/4	5/16	3/8	1/2	5/8	3/4	7/8	1
T.P.I	20	18	16	13	11	10	9	8
s	7/16	1/2	9/16	3/4	15/16	1.1/8	1.5/16	1.1/2
e-m/m (min)	12.39	14.15	15.95	21.34	26.69	31.85	37.21	42.55
k (max)	0.163	0.211	0.243	0.323	0.403	0.483	0.563	0.627
Available	1	1.1/4	1.1/4	1.3/4	2	2.1/4	2.1/2	3
To	To	To	To	To	To	To	To	To
Lengths	3	4	6	6	6	7	6	6.1/2
	b - Length Of Thread Up To 152m/m							
	19	22	25	32	38	44	51	57
	b - Length Of Thread Over 152m/m							
						51		

BUMAX 88 Austenitic Stainless Steel Offers Better Corrosion Resistance Than Standard A4
Due To Higher Molybdenum Content

INFORMATION AND DRAWINGS PROVIDED ARE FOR REFERENCE ONLY