


BUMAX 88 ANSI B 18.2.2 UNC Hexagon Fullnuts

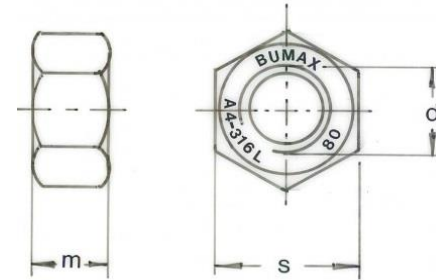

BUMAX 88 ANSI B 18.2.2 UNC Hexagon Fullnuts												
Thread - d	1/4	5/16	3/8	7/16	1/2	5/8	3/4	7/8	1			
T.P.I	20	18	16	14	13	11	10	9	8			
s - (max)	0.438	0.500	0.562	0.688	0.750	0.938	1.125	1.312	1.500			
m - (max)	0.226	0.273	0.337	0.385	0.448	0.559	0.665	0.776	0.887			

Material	Strength Classification	Size
<i>BUMAX 88 Austenitic Stainless Steel</i>	<i>80</i>	<i>1/4 - 1"</i>

BUMAX 88 Offers Better Corrosion Resistance Than Standard A4 Due To Its High Molybdenum Content

INFORMATION AND DRAWINGS PROVIDED ARE FOR REFERENCE ONLY