


BUMAX 88 ANSI B 18.2.1 UNC Hexagon Head Setscrews

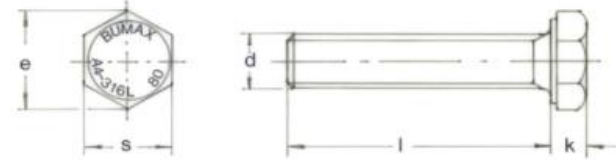

| BUMAX 88 ANSI B 18.2.1 UNC Hexagon Head Setscrews | | | | | | | | | | | | | |
|---|------------------|----------------|----------------|------------------|------------------|------------------|-------|------------------|--|--|--|--|--|
| Diameter | 1/4 | 5/16 | 3/8 | 1/2 | 5/8 | 3/4 | 7/8 | 1 | | | | | |
| T.P.I. | 20 | 18 | 16 | 13 | 11 | 10 | 9 | 8 | | | | | |
| s | 0.438 | 0.500 | 0.562 | 0.750 | 0.938 | 1.125 | 1.312 | 1.500 | | | | | |
| e (min) | 12.39 | 14.15 | 15.95 | 21.34 | 26.69 | 31.85 | 37.21 | 42.55 | | | | | |
| k (max) | 0.163 | 0.211 | 0.243 | 0.323 | 0.403 | 0.483 | 0.563 | 0.627 | | | | | |
| BUMAX 88 Available Lengths | 1/2 To 3/4 | 1/2 To 1 | 5/8 To 1 | 1 To 1.1/2 | 1 To 1.3/4 | 1.1/4 To 2 | | 2 To 2.1/2 | | | | | |

BUMAX 88 Austenitic Stainless Steel Offers A Better Corrosion Resistance Than Standard A4 Due To Higher Molybdenum Content

DRAWINGS AND INFORMATION PROVIDED ARE FOR REFERENCE ONLY