


BUMAX 88 ANSI B 18.3 UNC Socket Capscrews

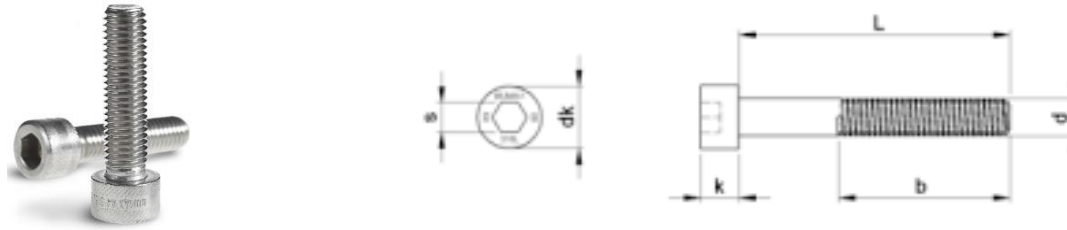

BUMAX 88 ANSI B 18.3 UNC Socket Capscrews								
Diameter	1/4	5/16	3/8	1/2	5/8	3/4	7/8	1
T.P.I.	20	18	16	13	11	10	9	8
dk	0.375	0.469	0.562	0.750	0.938	1.125	1.312	1.500
k	0.250	0.312	0.375	0.500	0.625	0.750	0.875	1.000
s	3/16	1/4	5/16	3/8	1/2	5/8	3/4	3/4
	Length Of Thread Engagement - b (m/m)							
b	25	28	38	38	51	57	76	76
Available	1/2	1/2	3/4	1	1.1/4	2.1/2	2	2
	To	To	To	To	To	To	To	To
Lengths	1.1/2	2	2.1/2	3	4	3	4	4

BUMAX 88 Austenitic Stainless Steel

Offers A Better Corrosion Resistance Than Standard A4 Due To Higher Molybdenum Content

INFORMATION AND DRAWINGS PROVIDED ARE FOR REFERENCE ONLY