


BUMAX 88 And BUMAX 109 ISO 4762 Socket Capscrews

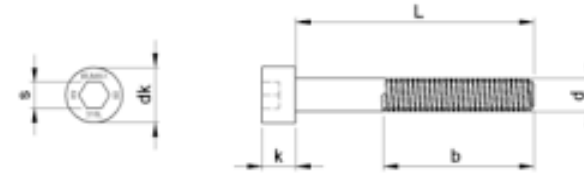

BUMAX 88 And Bumax 109 ISO 4762 Socket Capscrews														
Diameter	M3	M4	M5	M6	M8	M10	M12	M16	M20	M24				
Pitch	0.5	0.7	0.8	1.0	1.25	1.0	1.75	2.0	2.5	3.0				
dk	5.5	7.0	8.5	10	13	16	18	24	30	36				
k	3	4	5	6	8	10	12	16	20	24				
s	2.5	3	4	5	6	8	10	14	17	19				
	Length Of Thread Engagement - b													
b	18	20	22	24	28	32	36	44	42	60				
BUMAX 88 Available Lengths	3 To 35	6 To 80	10 To 100	12 To 100	16 To 100	16 To 120	20 To 150	30 To 150	30 To 190	50 To 170				
BUMAX 109 Available Lengths		12 To 40		12 To 80	16 To 90	20 To 110	25 To 120	40 To 130	140					

BUMAX 88 Offers Better Corrosion Resistance Than Standard A4 Due To Its High Molybdenum Content
 BUMAX 109 Same Material As BUMAX 88 But Has Higher Strength Due To Special Manufacturing Process

INFORMATION AND DRAWINGS PROVIDED ARE REFERENCE ONLY