


BUMAX 88 And BUMAX 109 ISO 4014 Hexagon Head Bolts

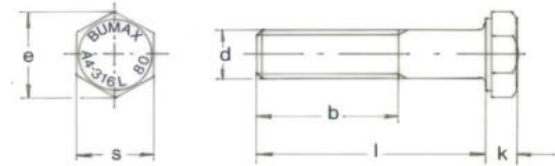

BUMAX 88 And BUMAX 109 ISO 4014 Hexagon Head Bolts														
Diameter	M6	M8	M10	M12	M14	M16	M18	M20	M24	M27	M30	M36		
Pitch	1.0	1.25	1.5	1.75	2.0	2.0	2.5	2.5	3.0	3.0	3.5	4.0		
s	10	13	16	18	21	24	27	30	36	41	46	55		
e (min)	11.05	14.38	17.77	20.03	23.35	26.75	30.14	33.53	39.98	45.2	50.85	60.8		
k	4.0	5.3	6.4	7.5	8.8	10.0	11.5	12.5	15.0	17.0	18.7	22.5		
BUMAX 88 Available Lengths	30 To 100	35 To 100	40 To 160	40 To 180	80 To 140	50 To 200	70 To 150	60 To 200	75 To 340	100 To 200	75 To 200	100 To 200		
BUMAX 109 Available Lengths	30 To 80	35 To 80	45 To 100	35 To 120		60 To 120								
	b- Length Of Thread Up To 152m/m													
	18	22	26	30	34	38	42	46	54	60	66	—		
	b-Length Of Thread Over 152m/m													
	24	28	32	36	40	44	48	52	60	66	72	84		

BUMAX 88 Austenitic Stainless Steel Offers A Better Corrosion Resistance Than Standard A4 Due To Higher Molybdenum Content
 BUMAX 109 Same Material As BUMAX 88 But Higher Strength Due To Special Manufacturing Process

INFORMATION AND DRAWINGS PROVIDED ARE FOR REFERENCE ONLY