


BUMAX 88 ISO 10642 Socket Countersunk Screws

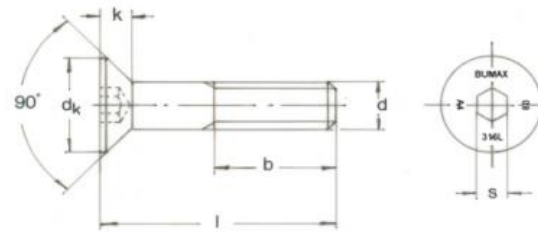

BUMAX 88 Socket Countersunk Screws								
Diameter	M3	M4	M5	M6	M8	M10	M12	M16
Pitch	0.5	0.7	0.8	1.0	1.25	1.5	1.75	2.0
dk	6.72	8.96	11.20	13.44	17.92	22.40	26.88	30.88
k	1.86	2.48	3.1	3.72	4.96	6.2	7.44	8.8
s	2	2.5	3	4	5	6	8	10
	Length Of Thread Engagement - b							
b	18	20	22	24	28	32	36	44
Available	6	10	10	10	12	20	30	40
Lengths	To 20	To 30	To 30	To 60	To 70	To 50	To 70	To 100

BUMAX 88 Austenitic Stainless Steel

Offers A Better Corrosion Resistance Than Standard A4 Due To Higher Molybdenum Content

INFORMATION AND DRAWINGS PROVIDED ARE FOR REFERENCE ONLY