


Blind Bolts

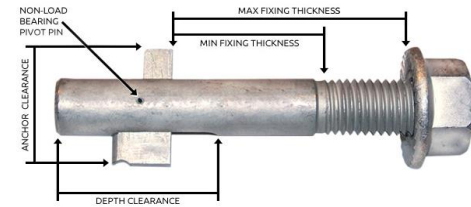

Blind Bolts Geomet 500 - Grade 10.9							
Bolt Size	Hole Diameter	Fixing Thickness		Anchor Clearance	Depth Clearance	Minimum Hole Centres	Box Qty
		Min.	Max.				
M8 x 50	9	9	24	19	25	20	50
M10 x 60	11	10	30	23	30	20	40
M10 x 95	11	25	65	23	30	20	20
M10 x 130	11	55	100	23	30	20	20
M12 x 70	13	13	35	26	35	25	20
M12 x 120	13	30	85	26	35	25	25
M12 x 180	13	80	140	26	35	25	20
M16 x 90	17	13	43	36	43	35	20
M16 x 130	17	40	75	36	43	35	15
M16 x 180	17	55	125	36	43	35	10
M20 x 110	22	21	56	44	56	48	10
M20 x 140	22	21	86	44	56	48	8
M20 x 180	22	80	120	44	56	48	10
M20 x 250	22	130	185	44	56	48	10
M24 x 130	26	21	66	53	64	60	5
M30 x 140	32	27	60	65	72	75	5

For Hollow Sections - Masonry Support - Cladding And Facades

A4 Stainless Steel							
Bolt Size	Hole Diameter	Fixing Thickness		Anchor Clearance	Depth Clearance	Minimum Hole Centres	Box Qty
		Min.	Max.				
M8 x 50	9	9	24	19	25	20	50
M10 x 60	11	10	30	23	30	20	40
M12 x 90	13	12	55	26	35	25	20
M16 x 100	17	13	53	36	43	35	20

For Marina Fitting Applications

INFORMATION AND DRAWINGS PROVIDED ARE FOR REFERENCE ONLY