


## Broaching Flared Mounted Standoffs

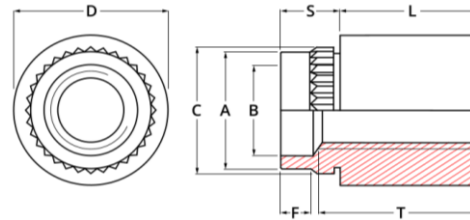

Broaching Flared Mounted Standoffs									
Thread And Pitch	Panel Thickness	Hole Size + 0.13 / - 0.3	A Max	B +/- 0.08	C +/- 0.08	D + / - 0.13	F + / - 0.25	S Max.	Min. CL To Edge Of Panel
M3 x 0.5	1.27 - 1.65	4.22	4.2	3.23	4.55	5.56	1.00	2.29	4.33
M4 x 0.7	1.27 - 1.65	6.40	6.33	5.23	6.68	8.74	1.00	2.29	6.36

Stand off Length (L)	Minimum Length (T) Where Applicable
3	Fully Threaded
4	
5	
6	
8	
10	9.50 +/- 0.40
12	
14	
16	

Material And Finish
<i>Brass Eletro Tin Plated</i>

INFORMATION AND DRAWINGS PROVIDED ARE FOR REFERENCE ONLY