



Captive Slot Cheese Head Screws

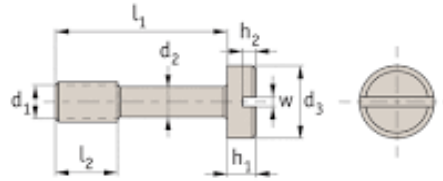

Screw The Captive Screw Through
The Screw Hole In The Cover
When The Screw Has Been
Removed From The Frame/Panel



The Screw Will Not Fall From The
Cover Due To The Thread Catching
Against The Screw Hole In The
Cover.
Often Used With A Captive Washer

Captive Slot Cheese Head Screws							
Diameter-d1	M2	M2.5	M3	M3.5	M4	M5	M6
d2 - (+/- 0.12)	1.2	1.7	2	2.3	2.8	3.7	4.2
L2 - (+/- 0.25)	3	3.7	4.5	5.2	6	7.5	7.5
d3	3.8	4.5	5.5	6	7	8.5	10
h1	1.3	1.6	2	2.4	2.6	3.3	3.9
h2	0.85	1	1.3	1.4	1.6	2	2.3
w	0.5	0.6	0.8	1	1.2	1.2	1.6
	Lengths - L1 (+/- 1.5mm)						
	10	10	10	10	10	10	16
	To	To	To	To	To	To	To
	20	30	40	40	60	80	80

Material: A2 Stainless Steel

INFORMATION AND DRAWINGS PROVIDED ARE FOR REFERENCE ONLY