


Closed Seam Rolled Clearance Spacers

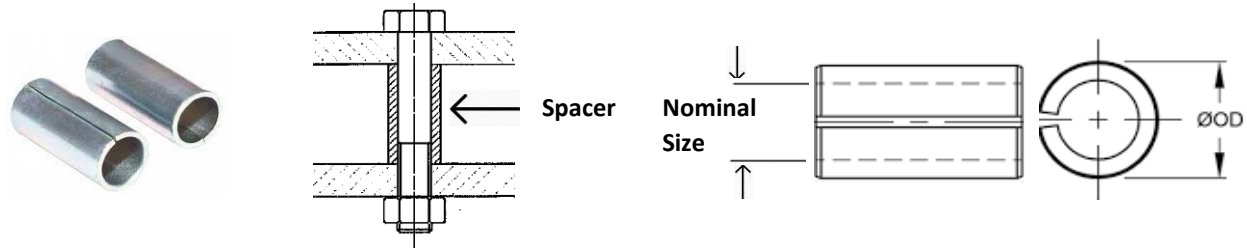

| Closed Seam Rolled Clearance Spacers | | | | | | | | | |
|--------------------------------------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| Nominal Size | 2 | 2.5 | 3 | 3.5 | 4 | 5 | 6 | 8 | 10 |
| Inside Dia-d Min | 2.15 | 2.65 | 3.15 | 3.65 | 4.15 | 5.2 | 6.2 | 8.2 | 10.2 |
| Inside Dia-d Max | 2.30 | 2.80 | 3.30 | 3.80 | 4.30 | 5.40 | 6.40 | 8.50 | 10.5 |
| Wall Thickness | 0.30 | 0.30 | 0.50 | 0.50 | 0.70 | 0.70 | 0.90 | 1.10 | 1.20 |
| Outside Dia.-D | 2.90 | 3.40 | 4.30 | 4.80 | 5.70 | 6.80 | 8.20 | 10.70 | 12.90 |
| Lengths - L | 4 | 4 | 4 | 4 | 4 | 6 | 6 | 8 | 8 |
| | To 30 | To 30 | To 60 | To 60 | To 70 | To 70 | To 70 | To 70 | To 70 |

Length Tolerance : + / - 0.15mm

| Material | |
|------------|-------------|
| Mild Steel | Zinc Plated |

Used To Separate Two components In An Assembly Joined Together With A Screw Which Is Passed Through The Spacer Which Are Designed For A Clearance Fit
Designed For The Lowest Cost Application And Where A Higher Compression Strength Is Not Necessary.

INFORMATION AND DRAWINGS PROVIDED ARE FOR REFERENCE ONLY