


Copper-Steel Dome Head Lubricated Rivets

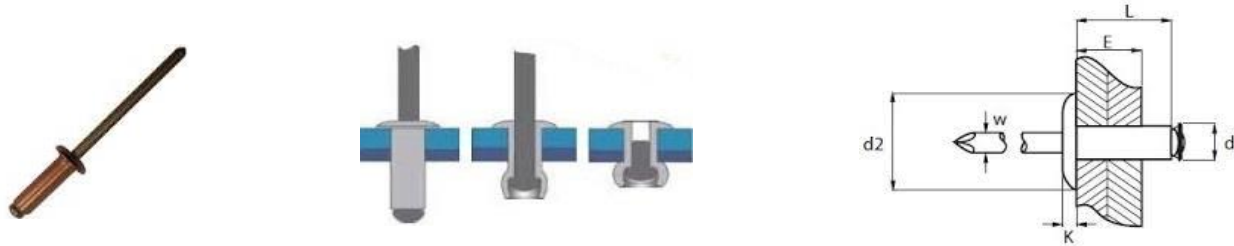

Copper-Steel Dome Head Lubricated Rivets						
d1	Available Lengths	Grip Range - E	Drill Size	d2	k	w
3.2	6.5	0.5	3.3	6.30	1.40	1.70
	Up To	Up To				
	12	8.0				
4.0	8	0.5 - 3.0	4.1	8.00	1.40	2.20
	And					
	10	3.0 - 5.0				
4.8	9.5	1.0 - 4.5	4.9	9.50	1.60	2.65
	And					
	12	4.0 - 7.0				

Material: *Body Copper*
 Mandrel Steel Lubricated

Thermal And Electrical Conductor
Soft Material Applications

INFORMATION AND DRAWINGS PROVIDED ARE FOR REFERENCE ONLY