


Csk Head Sleeve Anchor (Phillips Drive)



Csk Head Sleeve Anchor (Phillips Drive)										
Part Number	Drill Diameter mm mm	Overall Anchor Length mm	Head Diameter mm	Maximum Fixing Thickness mm	Fixture Clearance Hole mm	Embedment Depth mm	Minimum Hole Depth mm	Head Drive Phillips	Minimum Structure Thickness mm	Installation Torque Nm
SLC08060	8	65	12	30	10	35	40	No3	100	10
SLC08065	8	88		53						
SLC10075	10	78	16	38	12	40	45	No3	100	20
SLC10100	10	100		60						

Zinc Plated And Yellow Passivated Torque Controlled Through Fixing

Suitable For Use In Non Cracked Concrete, Dense Concrete Blocks, Solid Bricks And Some Natural Stone

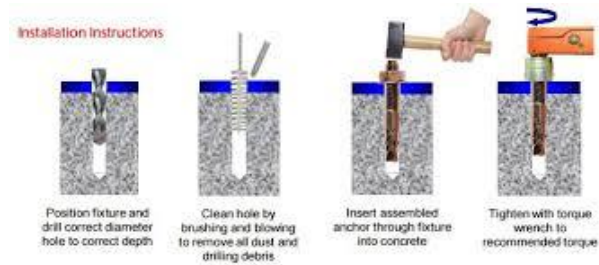

INFORMATION AND DRAWINGS SUPPLIED ARE FOR REFERENCE ONLY