


DIN 916 Plain Cup Point Socket Setscrews

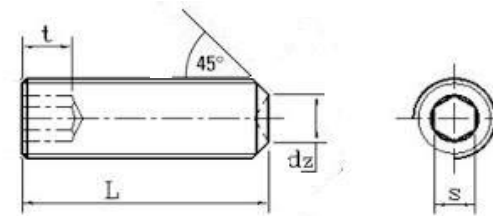

DIN 916 Plain Cup Point Socket Setscrews													
Diameter	M1.6	M2	M2.5	M3	M3.5	M4	M5	M6	M8	M10	M12	M16	M20
dz	0.80	1.00	1.20	1.40		2.00	2.50	3.00	5.00	6.00	8.00	10.00	14.00
s-A/F	0.70	0.90	1.3	1.5		2	2.5	3	4	5	6	8	10
t-Min	0.7	0.9	1.2	1.2		1.5	2	2	3	4	4.8	6.4	8

L-Available Lengths On Request

*The Point Angle Shall Be 45° For Screws Equal To OR Longer Than The Screw Diameter
And Minimum 30° For Screws Shorter In Length Than The Diameter

IE: M6 x 5 (Point Angle 30°)

Material	Diameters	Finish
Alloy Steel Grade 14.9	M2 - M20	Self Colour
Alloy Steel Grade 14.9	M3 - M12	Zinc (CR3)
Stainless Steel	M1.6 - M16	A2
Stainless Steel	M2.5 - M16	A4

INFORMATION AND DRAWINGS PROVIDED ARE REFERENCE ONLY