


Cylindrical Head Concrete Screws

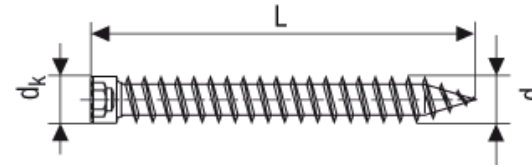

Cylindrical Head Concrete Screws						
Part Ref	Screw Size d x L	dk	Hole Dia.	Minimum Hole Depth	Maximum Fixing Thickness	Hexagon Drive (a/f)
CS75060CH	7.5 x 60	8m/m	6m/m	45	20	4m/m
CS75080CH	7.5 x 80	8m/m	6m/m	45	40	4m/m
CS75100CH	7.5 x 100	8m/m	6m/m	45	60	4m/m
CS75120CH	7.5 x 120	8m/m	6m/m	45	80	4m/m
CS75150CH	7.5 x 150	8m/m	6m/m	45	110	4m/m
CS75180CH	7.5 x 180	8m/m	6m/m	45	140	4m/m
CS75210CH	7.5 x 210	8m/m	6m/m	45	170	4m/m

Material: Steel Zinc And Yellow

Installation Of Wooden Door And Window Frames To Concrete

INFORMATION AND DRAWINGS PROVIDED ARE FOR REFERENCE ONLY