



DIN 2093 Disc Springs 112m/m - 160m/m Outside Diameter

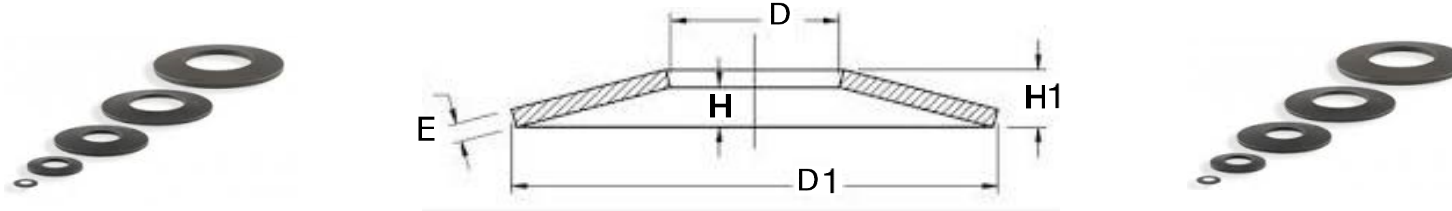


| DIN 2093 112m/m - 160m/m Outside Diameter | | | | | |
|---|-------|------|------------|------|-------|
| Code | D1 | D | E | H | H1 |
| D112573 | 112.0 | 57.0 | 3.00 | 3.90 | 6.90 |
| D112574 | 112.0 | 57.0 | 4.00 | 3.20 | 7.20 |
| D112576 | 112.0 | 57.0 | 6.00 | 2.50 | 8.50 |
| D125414 | 125.0 | 41.0 | 4.00 | 4.20 | 8.20 |
| D125514 | 125.0 | 51.0 | 4.00 | 4.50 | 8.50 |
| D125515 | 125.0 | 51.0 | 5.00 | 3.90 | 8.90 |
| D125516 | 125.0 | 51.0 | 6.00 | 3.40 | 9.40 |
| D125615 | 125.0 | 61.0 | 5.00 | 4.00 | 9.00 |
| D125616 | 125.0 | 61.0 | 6.00 | 3.60 | 9.60 |
| D125618 | 125.0 | 61.0 | *8.00/7.50 | 3.40 | 10.90 |
| D1256435 | 125.0 | 64.0 | 3.50 | 4.50 | 8.00 |
| D125645 | 125.0 | 64.0 | 5.00 | 3.50 | 8.50 |
| D125645 | 125.0 | 64.0 | 6.00 | 3.60 | 9.60 |
| D125647 | 125.0 | 64.0 | *7.00/6.55 | 3.45 | 11.00 |
| D125648 | 125.0 | 64.0 | *8.00/7.50 | 3.10 | 10.60 |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

D1 - Outside Diameter
D = Inner Diameter
E = Material Thickness
H = Free Cone Height
H1 = Free Height Of Disc
* = Reduced Thickness Dimension



| DIN 2093 112m/m - 160m/m Outside Diameter | | | | | |
|---|-------|------|-------------|------|-------|
| Code | D1 | D | E | H | H1 |
| D125716 | 125.0 | 71.0 | 6.00 | 3.3. | 9.30 |
| D125718 | 125.0 | 71.0 | *8.00/7.40 | 3.00 | 10.40 |
| D1257110 | 125.0 | 71.0 | *10.00/9.20 | 2.60 | 11.80 |
| D1407238 | 140.0 | 72.0 | 3.80 | 4.90 | 8.70 |
| D140725 | 140.0 | 72.0 | 5.00 | 4.00 | 9.00 |
| D140728 | 140.0 | 72.0 | *8.00/7.50 | 3.70 | 11.20 |
| D150615 | 150.0 | 61.0 | 5.00 | 5.30 | 10.30 |
| D150616 | 150.0 | 61.0 | 6.00 | 4.80 | 10.80 |
| D150716 | 150.0 | 71.0 | 6.00 | 4.80 | 10.80 |
| D150718 | 150.0 | 71.0 | *8.00/7.50 | 4.50 | 12.00 |
| D150818 | 150.0 | 81.0 | *8.00/7.50 | 4.20 | 11.70 |
| D1508110 | 150.0 | 81.0 | *10.00/9.30 | 3.70 | 13.00 |
| D1608243 | 160.0 | 82.0 | 4.30 | 5.60 | 9.90 |
| D160828 | 160.0 | 82.0 | 8.00 | 4.50 | 12.50 |
| D1608210 | 160.0 | 82.0 | *10.00/9.40 | 4.10 | 13.50 |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |



DIN 2093 Specification Classes Disc Springs Into Three Groups

- Group 1: Under 1.5m/m Thick - Cold Formed - Radiused Edges - Without Bearing Flats
- Group 2: 1.25m/m Thick Upto And Including 6m/m - Cold Formed Machined (Of Fine Blanked) Radiused Edges - Without Bearing Flats
- Group 3: Over 6m/m Thick - Fully Machined From Forged Blanks With Bearing Flats And Thickness Reduced