


## Din 7984 Low Head Socket Capscrews

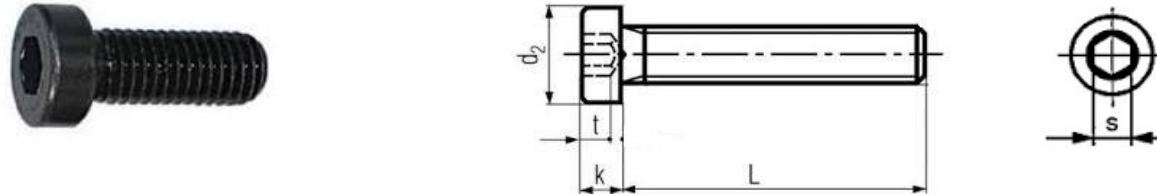

DIN 7984 Low Head Socket Capscrews															
Diameter	M3	M4	M5	M6	M8	M10	M12	M14	M16	M18	M20	M22	M24	M27	M30
d2-Max	5.50	7.00	8.50	10.00	13.00	16.00	18.00	21.00	24.00	27.00	30.00	33.00	36.00	40.00	45.00
k-Max	2.00	2.80	3.50	4.00	5.00	6.00	7.00	8.00	9.00	10.00	11.00	12.00	13.00	15.00	17.00
s-A/F	2	2.5	3	4	5	7	8	10	12	12	14	14	17	17	19
t-Max	1.62	2.42	2.82	3.12	3.95	4.65	5.15	5.45	5.65	6.68	7.68	8	8	9	10

Minimum Full Thread 2D + 12mm

*L - Available Lengths On Request*

Material	Finish	Diameters
Grade 8.8	Self Colour And Zinc (CR3)	M3 - M16
Alloy Steel Grade 12.9	Self Colour	M3 - M30
Alloy Steel Grade 12.9	Zinc (CR3) On Request	On Request
Stainless Steel A2 And A4		M3 - M24

INFORMATION AND DRAWINGS PROVIDED ARE FOR REFERENCE ONLY