


DIN 2093 Disc Springs 18m/m 22.5m/m Outside Diameter

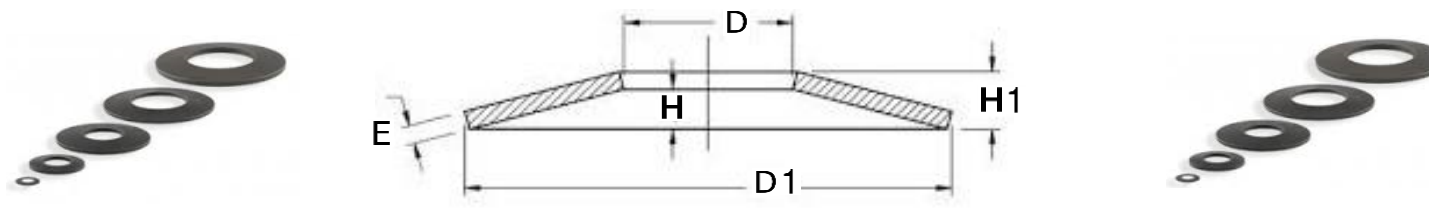

DIN 2093 18m/m - 22.5m/m Outside Diameter					
Code	D1	D	E	H	H1
D186204	18.0	6.2	.40	.60	1.00
D186205	18.0	6.2	.50	.60	1.10
D186206	18.0	6.2	.60	.60	1.20
D186206	18.0	6.2	.70	.55	1.25
D186208	18.0	6.3	.80	.50	1.30
D188205	18.0	8.2	.50	.60	1.10
D188207	18.0	8.2	.70	.55	1.25
D188208	18.0	8.2	.80	.50	1.30
D18821	18.0	8.2	1.00	.40	1.40
D1892045	18.0	9.2	.45	.60	1.05
D189207	18.0	9.2	.70	.50	1.20
D18921	18.0	9.2	1.00	.40	1.40
D208206	20.0	8.2	.60	.70	1.30
D208207	20.0	8.2	.70	.65	1.35
D208208	20.0	8.2	0.90	0.60	1.40

D1 - Outside Diameter  
 D = Inner Diameter  
 E = Thickness  
 H = Cone Height  
 H1 = Overall Height

DIN 2093 18m/m - 22.5m/m Outside Diameter					
Code	D1	D	E	H	H1
D208209	20.0	8.2	.90	.55	1.45
D205209	20.0	8.2	.90	.55	1.45
D20821	20.0	8.2	1.00	.55	1.55
D2010204	20.0	10.2	.50	.50	.90
D2010205	20.0	10.2	.50	.65	1.15
D2010208	20.0	10.2	.80	.55	1.35
D2010209	20.0	10.2	.90	.55	1.45
D201021	20.0	10.2	1.00	.5	1.55
D2010211	20.0	10.2	1.10	.45	1.55
D20102125	20.0	10.2	1.25	.50	1.75
D2010215	20.0	10.2	1.5	.30	1.80
D22511206	22.2	11.2	.60	.80	1.40
D22511208	22.5	11.2	.80	.65	1.45
D225112125	22.5	11.2	1.00	.65	1.65
D225112125	22.5	11.2	1.25	.50	1.75

DIN 2093 Specification Classes Disc Springs Into Three Groups

- Group 1: Under 1.5m/m Thick - Cold Formed - Radiused Edges - Without Bearing Flats
- Group 2: 1.25m/m Thick Upto And Including 6m/m - Cold Formed Machined (Of Fine Blanked) Radiused Edges - Without Bearing Flats
- Group 3: Over 6m/mThick - Fully Machined From Forged Blanks With Bearing Flats And Thickness Reduced