


Hexagon Bolt Sleeve Anchor



Hexagon Bolt Sleeve Anchor									
Part Number	Outside Drill Diameter mm	Anchor Length mm	Thread Diameter mm	Maximum Fixing Thickness mm	Fixture Clearance Hole mm	Embedment Depth mm	Minimum Hole Depth mm	Structure Thickness mm	Installation Torque Nm
SLB08045	8	40	6	2	9	40	45	100	10
SLB08070		65		25					
SLB08080		90		45					
SLB10045	10	45	8	5	12	40	100	20	
SLB10055		55		15		45			
SLB10080		75		30					
SLB10100		95		50					
SLB12065	12	60	10	5	14	50	65	100	35
SLB12080		75		20					
SLB12100		95		40					
SLB12125		115		65					
SLB16075	16	65	12	5	18	55	65	100	45
SLB16110		100		40					

A Zinc Plated Yellow Passivated Torque Controlled Sleeve Anchor
 Suitable For Use In Non Cracked Concrete, Dense Concrete Blocks, Solid Bricks And Some Natural Stone

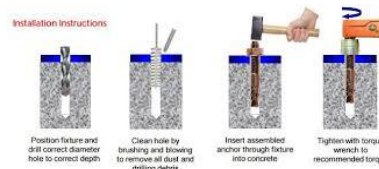

INFORMATION AND DRAWINGS PROVIDED ARE FOR REFERENCE ONLY