


DIN 980V Cleveloc All Metal Locking Nut

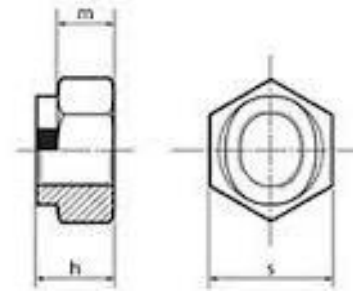

DIN 980V Cleveloc Style All Metal Locking Nut															
d	M4	M5	M6	M7	M8	M10	M12	M14	M16	M18	M20	M22	M24	M27	M30
m	2.2	2.75	3.3	3.85	4.4	5.5	6.6	7.7	8.8	9.9	11	12.2	13.2	14.8	16.5
h - Maximum	4.2	5.1	6	7	8	10	12	14	16	18	20	22	24	27	30
h - Minimum	3.9	4.8	5.7	6.5	7.5	9	11	12	14	16	18	20	22	25	28
s - Maximum	7	8	10	11	13	17	19	22	24	27	30	32	36	41	46
s - Minimum	6.75	7.78	9.8	10.73	12.73	16.73	18.67	21.67	23.67	26.16	29.16	31	35.0	40.0	45
Standard Pitch	0.7	0.8	1.0	1.0	1.25	1.5	1.75	2.0	2.0	2.5	2.5	2.5	3.0	3.0	3.5
Fine Pitch	—	—	0.75	—	1.0	1.25	1.5	1.5	1.5	2.0	2.0	2.0	2.0	2.0	2.0
Extra Fine Pitch	—	—	—	—	—	1.0	1.25	—	—	1.5	1.5	1.5	1.5	1.5	1.5

Material	Diameter	Finish
Steel Grade 8-10 & 12	M4 - M30	Zinc Plated

INFORMATION AND DRAWINGS PROVIDED ARE FOR REFERENCE ONLY