


Hexagon Flange Integral Seal Nuts

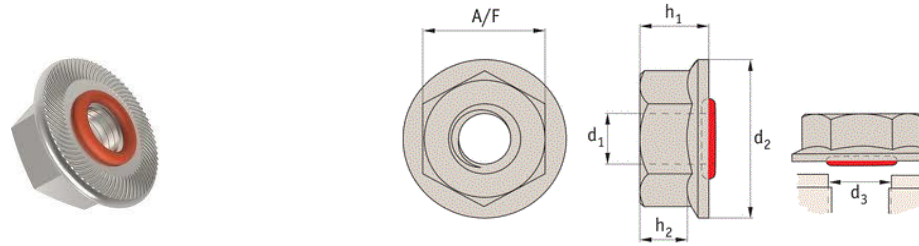

Hexagon Flange Integral Seal Nuts							
Thread-d1	M5	M6	M8	M10	M12	M14	M16
d2-Max	11.8	14.2	17.9	21.8	26	30	34.5
h1-Max	5	6	8	10	12	14	16
h2-Max	2.2	3.1	4.5	5.5	6.7	—	—
d3 +/- 0.05	5.6	6.8	8.5	10.6	12.85	15.1	17.5
A/F	8	10	13	15	18	21	24

Material: A2 Stainless Steel With Silicon 'O' Ring As Standard

Seals Substances In And Contaminants Out, Re-useable

Maximum Temperature Range 'C' -100^o To +260^o

Pressure Range: Up To 410 Bar (6000 psi)

Clearances Holes Recommended For Maximum Sealing Performance

2-3 x Thread Pitch (Metric Coarse Pitch Threads)

INFORMATION AND DRAWINGD PROVIDED ARE FOR REFERENCE ONLY