


ISO 8752 Slotted Spring Pins

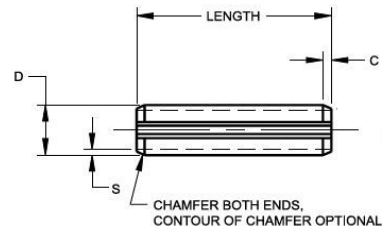

ISO 8752 Slotted Spring Pins						
D Nominal Pin Dia.	Pin Diameter		Chamfer Lgth C	Wall Thickness S	Rec. Hole Size	
	Min	Max			Min	Max
1.5	1.7	1.8	0.3	0.3	1.5	1.60
2	2.3	2.4	0.4	0.4	2.0	2.10
2.5	2.8	2.9	0.4	0.5	2.5	2.60
3	3.3	3.5	0.5	0.6	3.0	3.10
3.5	3.8	4.0	0.6	0.8	3.5	3.62
4	4.4	4.6	0.7	0.8	4.0	4.12
5	5.4	5.6	0.8	1.0	5.0	5.12
6	6.4	6.7	0.9	1.2	6.0	6.12
8	8.5	8.8	1.2	1.5	8.0	8.15
10	10.5	10.8	2.0	2.0	10.0	10.15
12	12.5	12.8	2.0	2.5	12.0	12.18
16	16.5	16.8	2.0	3.0	16.0	16.18
20	20.5	20.9	3.0	4.0	20.0	20.21

Available Lengths L On Request

Material	And	Pin	Hardness
Carbon Steel		HV	420-520
Martensitic Stainless Steel		HV	440-560
Austenitic Stainless Steel		Work	Hardened
Finish	K= Plain And Oiled P=Passivated		

INFORMATION AND DRAWINGS PROVIDED ARE FOR REFERENCE ONLY