


## Phillips Csk Head Self Drilling Screw

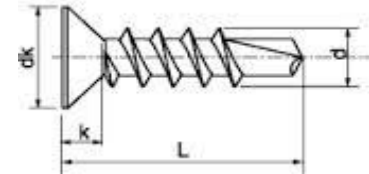

Phillips Csk Head Self Drilling Screw						
<b>d-Diameter</b>	<b>3.5</b>	<b>3.9</b>	<b>4.2</b>	<b>4.8</b>	<b>5.5</b>	<b>6.3</b>
<b>dk</b>	<b>8.3</b>	<b>8.3</b>	<b>8.8</b>	<b>10.5</b>	<b>11</b>	<b>13.5</b>
<b>k</b>	<b>3.4</b>	<b>3.4</b>	<b>4.1</b>	<b>4.3</b>	<b>5.4</b>	<b>5.9</b>
<b>Material Thickness</b>	<b>0.7 - 2.25</b>	<b>0.7 - 2.4</b>	<b>1.75 - 3</b>	<b>1.75 - 4.4</b>	<b>1.75 - 5.25</b>	<b>2 - 6</b>

L-Available Lengths On Request

Material	Finish
<i>Case Hardened Steel</i>	<i>Zinc Plated</i>

INFORMATION AND DRAWINGS PROVIDED ARE FOR REFERENCE ONLY