



Round Nylon Insulation Pillars


Type M (Male-Male)

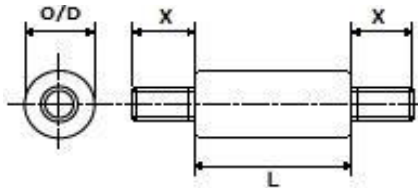

Type MF (Male-Female)

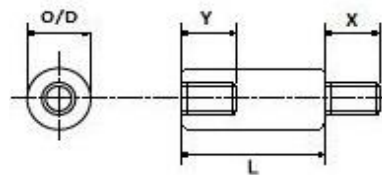

Type F (Female-Female)

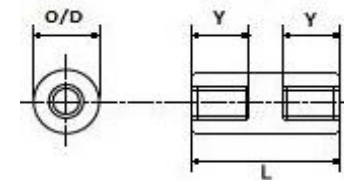

Round Nylon Insulating Pillars				
Thread	Minimum Body Length	Standard Outside Diameter	Body Length (L)	Standard Stud Length (X) And Female Thread Length (Y)
M2.5	13.0	8.0	13 - 100	6 mm
M3	13.0	8.0	13 - 100	6 mm
M3.5	13.0	8.0	13 - 100	6 mm
M4	13.0	8.0	13 - 100	6 mm
M5	19.0	9.5	19 - 100	10 mm
M6	22.0	12.7	22 - 100	12 mm
M8	25.0	15.9	25 - 100	14 mm
M8	35.0	19.0	35 - 100	14 mm
M10	40.0	25.0	40 - 100	20 mm

Materials	
Body	Insert
Nylon 66	Brass (CZ121) Self Colour

Flamability Rating : UL94-V2
And Operating Temperature:
- 30°C To + 80 °C

INFORMATION AND DRAWINGS PROVIDED ARE FOR REFERENCE ONLY