


## Self Clinch Concealed Head Studs

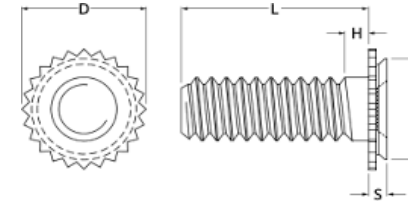

Self Clinch Concealed Head Studs								
Thread Size	Minimum Sheet Thickness	S Max	C Max	D +/- 0.25	Blind Hole Dia. +0.08 / -0.00	Min Blind Hole Depth	Max Hole In Attached Parts	Min CL To Edge Of Panel
M3 x 0.5 Pitch	1.60	1.04	4.35	5.21	4.37	1.10	3.60	4.00
	2.40	1.80				1.91		
M4 x 0.7 Pitch	1.60	1.04	7.35	8.33	7.37	1.10	4.60	5.60
	2.40	1.80				1.91		
M5 x 0.8 Pitch	1.60	1.04	7.90	8.89	7.93	1.10	5.60	6.40
	2.40	1.80				1.91		

Lengths		
M3	M4	M5
6	6	
8	8	
10	10	10
12	12	12
16	16	16
20	20	20
	25	25

Material : Stainless Steel - A2 And Suitable For Installation In Ductile Panels With A Maximum Recommended Hardness = 70 HRB

INFORMATION AND DRAWINGS PROVIDED ARE FOR REFERENCE ONLY