



Self Clinch Thin Panel High Strength Stud

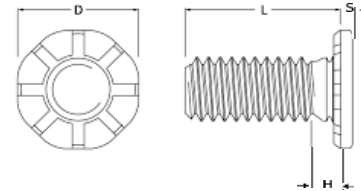

Self Clinch Thin Panel High Strength Studs							
Thread Size And Pitch	Min Sheet Thickness	D + 0.25 - 0.25	H Max.	S Max.	Hole Size + 0.13 - 0.0	Maximum Mating Hole	Minimum C/L To Edge Of Panel
M5 x 0.8	1.00	9.60	2.60	1.35	5.00	7.30	10.00
M6 x 1.0	1.00	11.35	2.80	1.52	6.00	8.30	11.50
M8 x 1.25	1.50	15.30	3.30	2.13	8.00	10.30	14.50

Lengths +/- 0.4mm	15	20	25	30	35	40	45	50		
M5 x 0.8	✓	✓	✓	✓	✓	✓	✓	✓		
M6 x 1.0	✓	✓	✓	✓	✓	✓	✓	✓		
M8 x 1.25	✓	✓	✓	✓	✓	✓	✓	✓		

Material
Steel Electro Zinc Plated 
Electro Tin Plated Through Hasrdened Steel Suitable For Installation In Ductile Material Panel With A Maximum Recommended Hardness Of 85 HRB

INFORMATION AND DRAWINGS PROVIDED ARE FOR REFERENCE ONLY