


Self Clinch Plunger Assembly

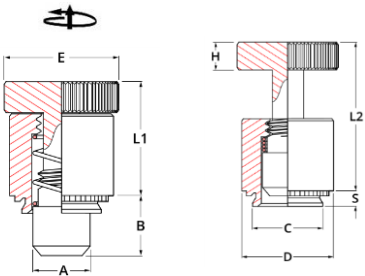

Self Clinch Plunger Assembly												
Type	S Max	C Max	A - 0.13	E +/-0.25	D +/-0.25	B +/-0.25	H +/-0.25	L1 +/-0.25	L2 Max	Minimum Sheet Thickness	Hole Size +0.08 - 0.0	Minimum CL To Edge Of Panel
Locking Plunger Assembly And	1.47	9.31	6.35	12.7	10.3	7.87	4.32	15.11	22.73	1.53	8.33	8.34
Non Locking Plunger Assembly	1.47	8.31	6.35	12.7	10.3	7.87	4.32	12.95	19.91	1.53	8.33	8.34

Material: Carbon Steel Electro Nickel Plated
And Suitable For Installation In Ductile Panels With A Maximum Hardness Of 80 HRFB

Part Number Examples

NTL2-04-4-CN (Locking Plunger Assembly)
NSL2-04-4CN (Non-Locking Plunger Assembly)

INFORMATION AND DRAWINGS PROVIDED ARE FOR REFERENCE ONLY