



Self Clinch Thin Panel Non Flush Head Studs

(Does Not Install Fully Flush On The Underside Of The Panel)

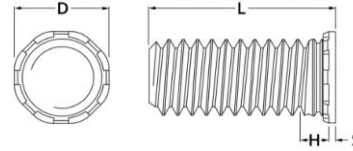

Self Clinch Thin Panel Non Flush Head Studs							
Thread And Pitch	Min. Sheet Thickness	D +/- 0.40	H Max.	S Max.	Hole Size +0.08 / 0.0	Maximum Mating Hole Dia.	Min. C/L To Edge Of Panel
M3 x 0.5	0.51	4.50	1.80	0.64	3.00	3.30	5.60
M4 x 0.7	0.51	5.80	1.80	0.64	4.00	4.70	7.20
M5 x 0.8	0.51	6.40	2.30	0.64	5.00	5.30	7.40

Lengths +/- 0.40		
M3	M4	M5
6	8	8
8	10	10
10	12	12
12	15	15
15	18	18
18	20	20
20	25	25
25	30	30
	35	35

Material	Finish
Carbon Steel	Electro Zinc Plated 
Suitable For Installation In Ductile Panels With A Maximum Hardness Of 80 HRB	
300 Series Stainless Steel (A2)	
Suitable For Installation In Ductile Panels With A Maximum Hardness Of 70 HRB	

INFORMATION AND DRAWINGS PROVIDED ARE FOR REFERENCE ONLY