


Socket Caphead Seal Screws

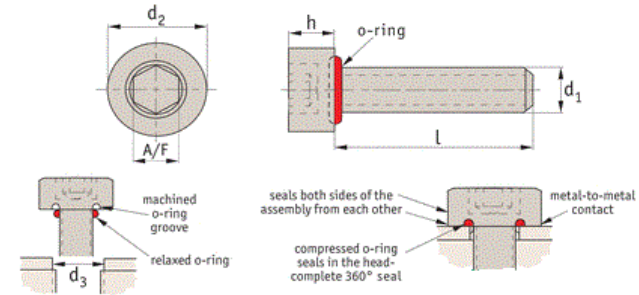

Socket Caphead Seal Screws										
Diameter-d1	M2	M2.5	M3	M4	M5	M6	M8	M10	M12	M16
h-Max	2	2.5	3	4	5	6	8	10	12	16
d2	3.8	4.7	5.5	7	8.5	10	13	16	18	24
A/F	1.5	2	2.5	3	4	5	6	8	10	14
d3 (+/- 0.05)	2.35	2.75	3.6	4.5	5.6	6.8	8.5	10.6	12.85	17.5
Lengths - L										
	4	6	6	6	8	12	12	16	20	
	To	To	To	To	To	To	To	To	To	To
	12	12	20	20	20	30	30	40	50	

Material: A2 And A4 Stainless Steel With Silicon 'O' Ring As Standard

Seals Substances In And Contaminants Out, Re-useable

Maximum Temperature Range 'C' -100^o To +260^o

Pressure Range: Up To 410 bar (6000 psi)

Clearance Hole Recommended For Maximum Sealing Performance

2-3 x Thread Pitch (Metric Coars Pitch Threads)

INFORMATION AND DRAWINGS PROVIDED ARE REFERENCE ONLY