


DIN 912 Socket Caphead Screws

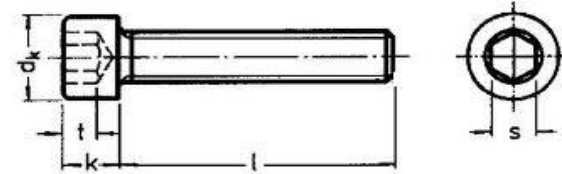

DIN 912 Socket Caphead Screws																					
Diameter	M1.4	M1.6	M2	M2.5	M3	M4	M5	M6	M8	M10	M12	M14	M16	M18	M20	M22	M24	M27	M30	M33	M36
dk	2.60	3.14	3.98	4.68	5.68	7.22	8.72	10.22	13.27	16.27	18.27	21.33	24.33	27.33	30.33	33.39	36.39	40.39	45.39	50.39	54.46
k	1.4	1.6	2	2.5	3	4	5	6	8	10	12	14	16	18	20	22	24	27	30	33	36
s-A/F	1.3	1.5	1.5	2	2.5	3	4	5	6	8	10	12	14	14	17	17	19	19	22	24	27
t-Min	0.60	0.70	1.00	1.10	1.30	2.00	2.50	3.00	4.00	5.00	6.00	7.00	8.00	9.00	10.00	11.00	12.00	13.00	15.50	17.00	19.00

Other Diameters On Request

Minimum Full Thread 2D + 12mm

L-Available Lengths On Request

Material	Finish	Diameters
Steel Grade 8.8	Self Colour And Zinc (CR3)	M3 - M24
Alloy Steel Grade 12.9	Self Colour And Zinc (CR3)	M1.4 - M36
Stainless Steel A2 And A4		M1.4 - M30
	Also Available	
Brass	Self Colour	M4 x 8 & 10m/m L/g M5 x 10 & 12m/m L/g M6 x 12 & 20m/m L/g

INFORMATION AND DRAWINGS PROVIDED ARE FOR INFORMATION ONLY