


## Speed Rivet BSR Dome Head

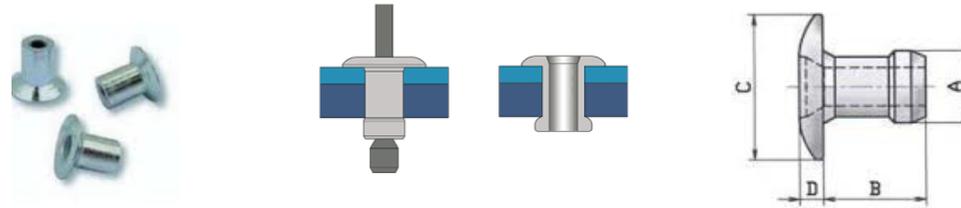

Speed Rivet BSR Dome Head						
d1	Available Lengths	Grip Range - E	Drill Size	d2 - Min	d2 - Max	k
3.2	4.3	1.20	3.26	5.9	6.4	1.00
	Up To 9.3	Up To 7.50	To 3.34			
4.0	4.9	1.6	3.97	7.5	8.0	1.00
	Up To 8.9	Up To 6.90	To 4.04			
4.8	6.1	2.15	4.85	9.0	9.6	1.20
	Up To 11.1	Up To 9.00	To 4.93			

**Material : Aluminium**

Supplied In A Strip Paper (Loading System) And Placed Using A Repetition System With A Single Mandrel  
No Interruptions And Up To 60 Rivets Per Minute Can Be Inserted Offering A Fast And High Precision Assembly  
Increasing Productivity

BSR Are Suitable For Applications Metal - Plastic & Aluminium Alloys  
Increases Productivity  
Expands Radially During Installation  
Good Resistance To Shear Strength

**INFORMATION AND DRAWINGS PROVIDED ARE FOR REFERENCE ONLY**