


Speed Rivet BSV Countersunk Head

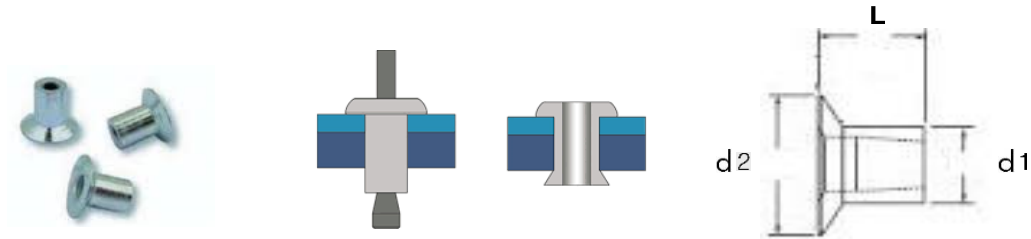

Speed Rivet BSV Countersunk Head						
d1	Available Lengths	Grip Range - E	Drill Size	d2 - Min	d2 - Max	
3.2	3.2	0.50	3.28	5.2	5.8	
	Up To 9.5	Up To 7.90	To 3.34			
4.0	4.8	1.60	4.09	6.2	6.8	
	Up To 11.2	Up To 9.50	To 4.76			
4.8	5.6	1.60	4.85	8.6	9.2	
	Up To 11.9	Up To 9.50	To 4.93			

Material: Steel

Supplied In A Strip Paper (Loading System) And Placed Using A Repetition System With A Single Mandrel
No Interruptions And Up To 60 Rivets Per Minute Can Be Inserted Offering A Fast And High Precision Assembly
Increasing Productivity

BSV Designed For The Joining Of Soft Or Low Resistance Materials
Good Resistance To Shear Strength
High Precision And High Quality Assembly
Fills The Hole Perfectly

INFORMATION AND DRAWINGS PROVIDED ARE FOR REFERENCE ONLY