


Speed Rivet BSR Dome Head

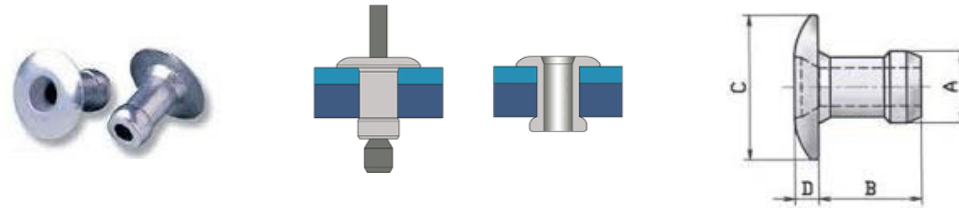

| Speed Rivets BSR Dome Head | | | | | | |
|----------------------------|---------------------|-----------------------|--------------------|----------|----------|------|
| d1 | Available Lengths | Grip Range - E | Drill Size | d2 - Min | d2 - Max | k |
| 3.2 | 4.3 Up To 6.3 | 1.20 Up To 4.40 | 3.27 To 3.34 | 5.8 | 6.4 | 1.00 |
| 4.0 | 4.9 Up To 6.9 | 1.60 Up To 4.90 | 3.97 To 4.04 | 7.5 | 8.0 | 1.00 |
| 4.8 | 5.4 Up To 7.3 | 1.70 Up To 5.20 | 4.85 To 4.93 | 9.0 | 9.6 | 1.20 |

Material : Stainless Steel A2

Supplied In A Strip Paper (Loading System) And Placed Using A Repetition System With A Single Mandrel
No Interruptions And Up To 60 Rivets Per Minute Can Be Inserted Offering A Fast And High Precision Assembly
Increasing Productivity

BSR Are Suitable For Applications Metal - Plastic & Aluminium Alloys
Increases Productivity
Expands Radially During Installation
Good Resistance To Shear Strength

INFORMATION AND DRAWINGS PROVIDED ARE FOR REFERENCE ONLY