

JCP CONSTRUCTION PRODUCTS



Nail In - Zinc Alloy

Data Sheet

Nail In - Zinc Alloy

A zinc alloy , hammer in fixings. Suitable for use in concrete, masonry and some natural stone.



Anchor Diameter	mm	6		
Anchor Length	mm	30	40	50
Flange head Diam.	mm	13		
Max. Fixture Thickness	mm	10	20	30
Drill Hole Diam	mm	6		
Min. Hole Depth	mm	30		
Rec. Tensile Loads	kN	1.1		
Rec. Shear Load	kN	1.1		


Lloads are for 30 N/mm² Concrete

Nail In Anchors are suitable for use in most solid base materials ranging from reinforced concrete, concrete blocks, brickwork and natural stone. They can also be used in some Hollow Materials depending on wall thickness and application, but their load capacity will be limited by the strength of the base material. Nail In anchors are all steel and are suitable for use where a higher degree of fire resistance is required.

Typical Applications:

Suspended Ceiling Hangers, Suspended Ceiling Trim, Electrical Boxes, Conduit clips. Signs

Installation Instructions

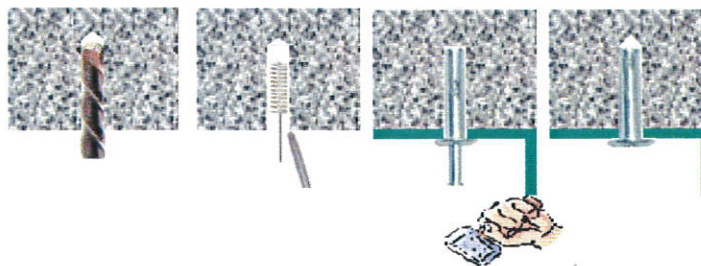

1. Drill correct diameter hole to correct depth in base material.
2. Clean hole by brushing and blowing
3. Insert Nail In through fixture into base material and hammer wedge into place