


DIN 603 Cup Square Hexagon Bolts C/W DIN 555 Hexagon Nuts

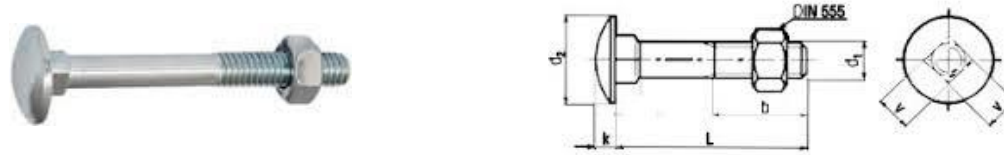

DIN 603 Cup Square Hexagon Bolts C/W DIN 555 Hexagon Nuts							
d1-Thread	M5	M6	M8	M10	M12	M16	M20
d2-Maximum	13.55	16.55	20.65	24.65	30.65	38.8	46.8
d2-Minimum	12.45	15.45	19.35	23.35	29.35	37.2	45.2
k - Maximum	3.3	3.88	4.88	5.38	6.95	8.95	11.05
k - Minimum	2.7	3.12	4.12	4.62	6.05	8.05	9.95
v - Maximum	5.48	6.48	8.85	10.58	12.7	16.7	20.84
v - Minimum	4.52	5.52	7.42	9.42	11.3	15.3	19.16
f - Maximum	4.1	4.6	5.6	6.6	8.75	12.9	15.9
f - Minimum	2.9	3.4	4.4	5.4	7.25	11.1	14.1
b-Upto 125	16	18	22	26	30	38	46
b-Upto 200	22	24	28	32	36	44	52
b-Over 200	/	/	41	45	49	54	65

L - Available Lengths On Request

Materials	Finish	Diameters
Grade 4.8 Steel	Self Colour	M6-M20
Grade 4.8 Steel	Zinc Plated (CR3)	M6-M20
Grade 4.8 Steel	Galvanised	On Request
Stainless Steel	A2-A4	M5-M16
And The	Following	Fully Threaded
Stainless Steel	A2-A4	M5-M16

INFORMATION AND DRAWINGS PROVIDED ARE FOR REFERENCE ONLY