


Self Clinch Flush Head Studs For Stainless Steel

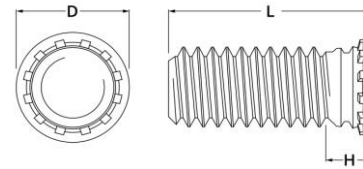

Self Clinch Flush Head Studs For Stainless Steel						
Thread Size And Pitch	H Maximum	D +/- 0.40	Minimum Sheet Thickness	Hole Size In Sheet +0.08 / -0.0	Maximum Mating Hole Size	Min.Centre Line To Edge Of Panel
M3 x 0.5	2.1	4.60	1.0 - 2.4	3.0	3.30	5.60
M4 x 0.7	2.4	5.90	1.0 - 2.4	4.0	4.70	7.20
M5 x 0.8	2.7	6.50	1.0 - 2.4	5.0	5.30	7.20
M6 x 1.0	3.0	8.20	1.6 - 3.0	6.0	6.80	7.90

Lengths +/- 0.4mm	6	8	10	12	15	18	20	22	25	30	35
M3 x 0.5	✓	✓	✓	✓	✓	✓	✓	✓	✓		
M4 x 0.7	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
M5 x 0.8		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
M6 x 1.0			✓	✓	✓	✓	✓	✓	✓	✓	✓

Material
<p style="text-align: center;"><i>Stainless Steel</i> <i>400 Series</i></p> <p style="text-align: center;">Suitable For Installation Into Ductile Panels With A Recommended Hardness Of 92 HRB</p>

INFORMATION AND DRAWINGS PROVIDED ARE FOR REFERENCE ONLY