


Commercial Pattern Dynamo Eyebolts

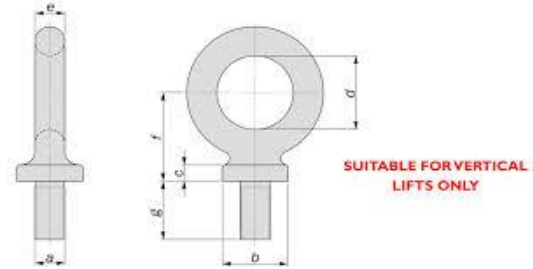

| Commercial Pattern Dynamo Eyebolts | | | | | | | | |
|------------------------------------|----|----|----|----|----|------------|------------|--------------------------|
| Thread | b | c | d | e | f | g | | SWL KGS Vertical Lift |
| | | | | | | STD. Shank | Long Shank | |
| M6 | 19 | 6 | 22 | 10 | 27 | 19 | 101 | 60 |
| M8 | 19 | 6 | 22 | 10 | 27 | 19 | 101 | 95 |
| M10 | 19 | 6 | 22 | 10 | 27 | 19 | 101 | 160 |
| M12 | 25 | 8 | 28 | 11 | 35 | 26 | 101 | 320 |
| M16 | 28 | 10 | 32 | 13 | 41 | 28 | 115 | 630 |
| M20 | 36 | 13 | 40 | 17 | 54 | 32 | 127 | 1250 |
| M22 | 38 | 13 | 44 | 17 | 57 | 41 | 127 | 1600 |
| M24 | 41 | 13 | 51 | 31 | 64 | 45 | 127 | 2000 |
| M27 | 54 | 16 | 60 | 26 | 73 | 51 | 152 | 2500 |
| M30 | 54 | 16 | 60 | 26 | 73 | 51 | 152 | 3200 |
| M33 | 57 | 18 | 76 | 28 | 89 | 57 | 152 | 4000 |
| M36 | 57 | 18 | 76 | 28 | 89 | 57 | 152 | 5000 |

ITEMS WILL BE SUPPLIED UNTESTED UNLESS REQUESTED
 SAFE WORKING LOADS ARE SUPPLIED BY MANUFACTURING
 IN CASES OF DOUBT OR IN CRITICAL APPLICATIONS A PROFESSIONAL ENGINEER SHOULD BE CONSULTED TO ASSESS THE LOAD OR TO TEST THE PRODUCT

| Materials | Finishes |
|------------------------------|----------------------|
| <i>BS970 080A27 (EN5A)</i> | <i>Self Colour</i> |
| <i>Hardened and Tempered</i> | <i>Galvanised</i> |
| <i>Stainless Steels</i> | <i>Electroplated</i> |
| <i>Alloy Steel B7</i> | <i>Sherardised</i> |
| | <i>PTFE Coating</i> |

INFORMATION AND DRAWINGS PROVIDED ARE FOR REFERENCE ONLY