


KLM Retaining Clips

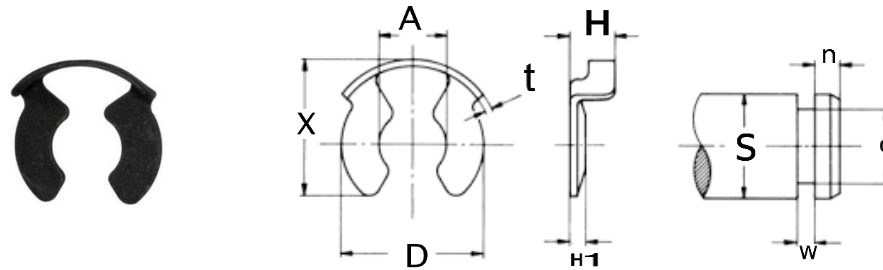

KLM Retaining Clips											
Shaft (mm)	Circlip Dimensions (mm)							Groove Dimensions (mm)			
	Tolerance	t	D	A	X	H	H1	G	Tolerance	W	n
4	+ 0.50	0.40	6.8	2.8	7.0	2.6	0.7	3.2		0.50	1.2
5	To		7.7	3.6	8.4	2.8		4.0	+ 0.000		1.5
6	- 0.00	0.50	10.6	4.6	11.2	3.5	0.9	5.0	To	0.70	1.8
8	+1.0/-0.00		11.5	5.6	11.8	4.0		6.0	- 0.0075		2.0
10	+ 2.0	0.60	16.0	7.5	15.7	5.0	1.2	8.0	+ 0.000	0.90	2.5
12	To	0.60	17.0	8.5	17.5	6.0	1.2	9.0	To	0.90	3.0
14	- 0.00	0.70	20.0	9.5	20.0	6.7	1.3	10.0	- 0.09	1.00	3.5
16	+4.0/-0.00	0.80	22.6	11.0	23.5	7.0	1.4	12.0	+0.00/-0.11	1.10	4.0

Material : Carbon Spring Steel

Finish: Phosphate and Oil

For Use With GM & GI Clevis Joints

Easily Pre-assembled Or Removed By Hand Without The Need For Tools